

VSUN395-72M

395W

Highest power output

19.89%


Module efficiency

12years

Material & Workmanship warranty

25years

Linear power output warranty

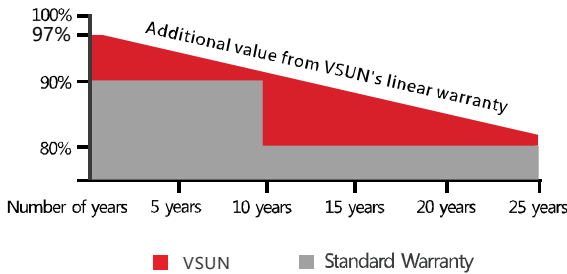

■ VSUN

■ Standard Warranty

Munich RE 



PID-free



World class mono efficiency



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions




Excellent performance under low light conditions



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

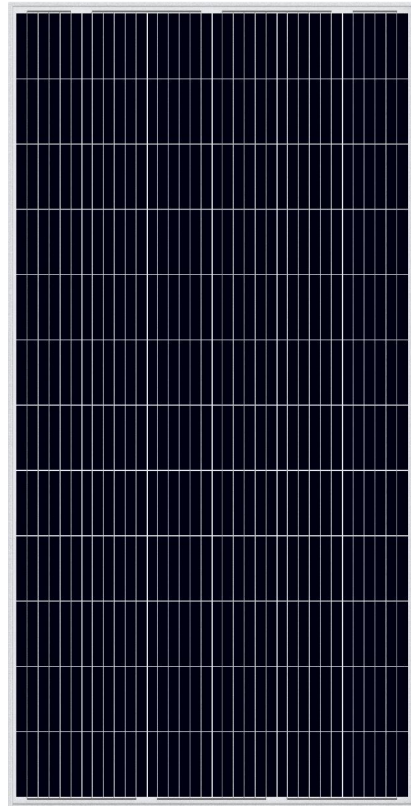

VSUN395-72M
VSUN385-72M

VSUN390-72M
VSUN380-72M

VSUN, a BNEF Tier-1 PV module manufacturer invested by Fuji Solar, has been committed to providing greener, cleaner and more intelligent renewable energy solutions. VSUN is dedicated to bringing reliable, customized and high-efficient products into various markets and customers worldwide



Engineered in Japan
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN395-72M	VSUN390-72M	VSUN385-72M	VSUN380-72M
Maximum Power - Pmax (W)	395	390	385	380
Open Circuit Voltage - Voc (V)	49.1	48.9	48.7	48.5
Short Circuit Current - Isc (A)	10.27	10.18	10.09	10.01
Maximum Power Voltage - Vmpp (V)	40.6	40.4	40.2	40
Maximum Power Current - Impp (A)	9.74	9.66	9.58	9.51
Module Efficiency	19.89%	19.64%	19.39%	19.13%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; Cell temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN395-72M	VSUN390-72M	VSUN385-72M	VSUN380-72M
Maximum Power - Pmax (W)	292.1	288.3	284.5	281
Open Circuit Voltage - Voc (V)	45.4	45.2	45	44.8
Short Circuit Current - Isc (A)	8.3	8.23	8.15	8.09
Maximum Power Voltage - Vmpp (V)	37.4	37.2	37.1	36.9
Maximum Power Current - Impp (A)	7.81	7.74	7.67	7.61

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s, ambient temperature 20°C. Measuring Tolerance: ±3%.

Temperature Characteristics

NOCT	45°C (±2/°C)
Voltage Temperature Coefficient	-0.29%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.39%/°C

Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

Material Characteristics

Dimensions	1982×1002×40mm (L×W×H)
Weight	22.4kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×12 pieces monocrystalline solar cells series strings
Junction Box	IP≥67, 3 diodes
Cable&Connector	Length 1200 mm, 1×4 mm ² , compatible with MC4


Packaging

Dimensions(L×W×H)	2010×1125×1132mm
Container20'	270
Container40'	594
Container40'HC	649

System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 ms-1
Maximum Surface Load	5,400 Pa
Application class	class A

Dimensions

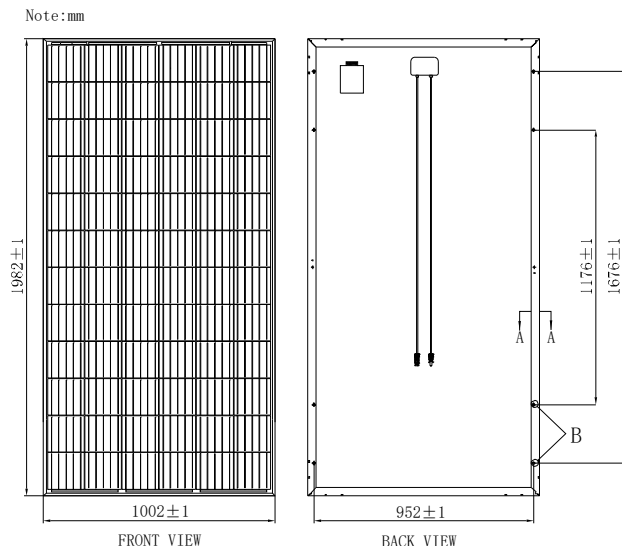

IV-Curves

